



CONNOR® SPORTS

HARDWOOD SYSTEMS

REZILLCHANNEL™

FIXED RESILIENT SYSTEM



CERTIFIED
BY THESE
LEADERS
IN SPORT



connorsports.com/hardwood

REZILLCHANNEL™

FIXED RESILIENT SYSTEM

Connor Sports • 800.283.9522 • 847.290.9020 • info@connorsports.com • connorsports.com/hardwood



RezillChannel heavy-duty wall to wall steel channel restraint provides outstanding buckle resistant stability.




Double plywood layer subfloor construction supported by resilient “Rezill” pads dispersed at two pads per square foot offers desired shock absorption and basketball rebound values.



REZILLCHANNEL FIXED RESILIENT SYSTEM




Performance Status:
Meets or exceeds
all the requirements
of DIN 18032, part 2

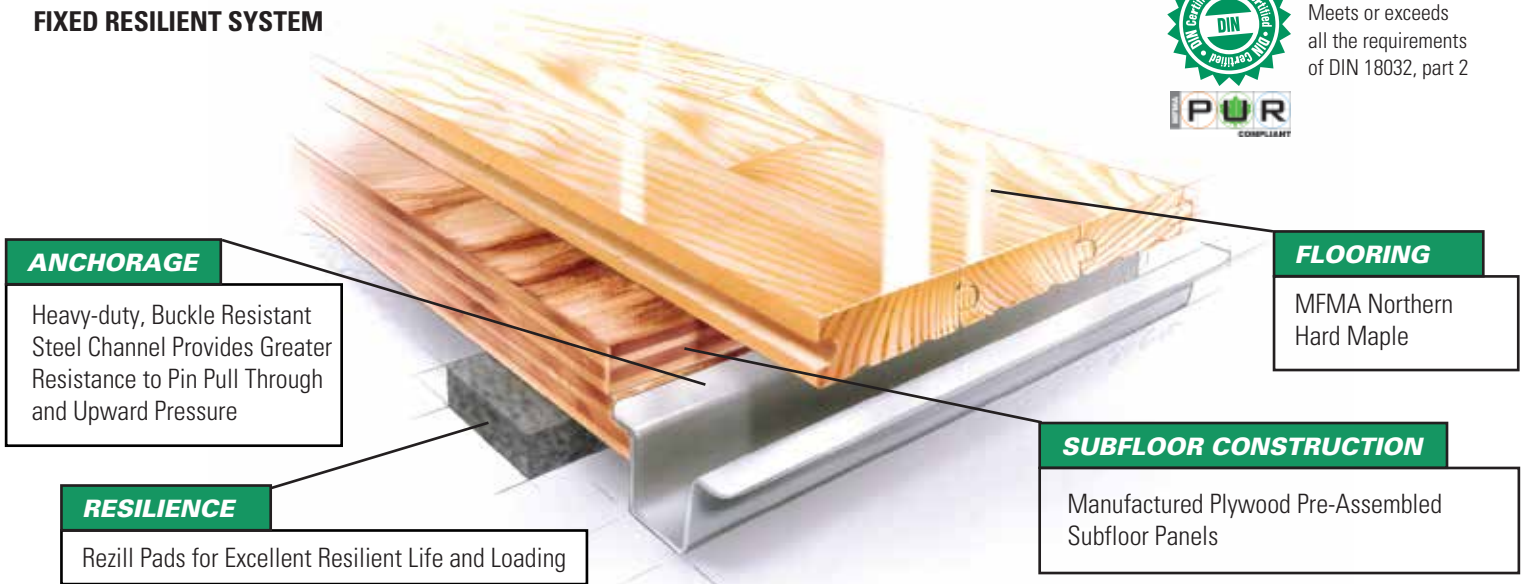


Slab Depression: 25/32" (20 mm) flooring - 2 1/8" (54 mm) • 33/32" (26 mm) flooring - 2 3/8" (60 mm)


Wall Base Detail

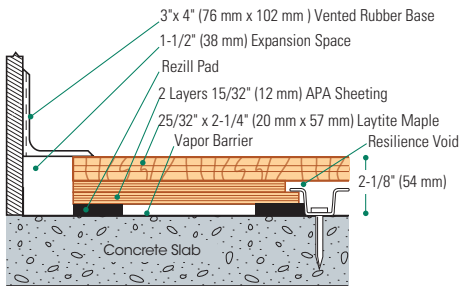

Threshold Detail (Optional Accessory)

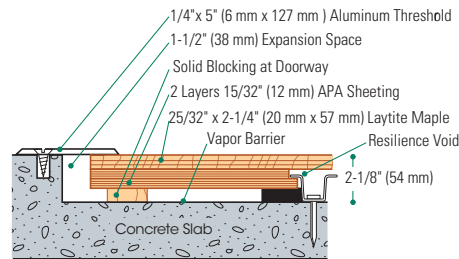

Equipment Detail (Optional Accessory)

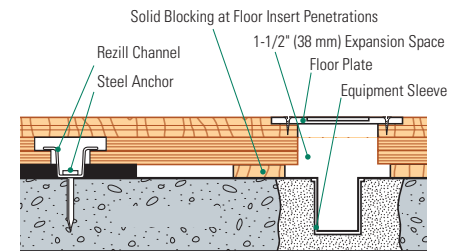

Manufacturing:
ISO 9001:2008
CERTIFIED
ISO 14001:2004
CERTIFIED



Recycled Contribution:
RezillChannel Subfloor System includes components with recycled content



Testing Laboratory:
United States Sports Surfacing Laboratory



Certified Testing:
ISSS Scientific Body Membership



Green Status
Managed Forests, Certification Available



Environmental Product Declaration
The First Sports Floor Manufacturer to Publish UL Certified Product-Specific Environmental Performance In Compliance with LEED V.4